



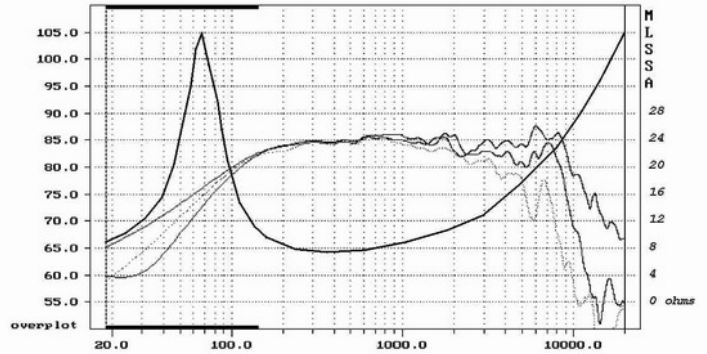

**4" Bass Midrange coated cone 8 ohms**

**AM100G2**

Non resonant die as chassis  
 High loss rubber surround  
 High temperature voice coil

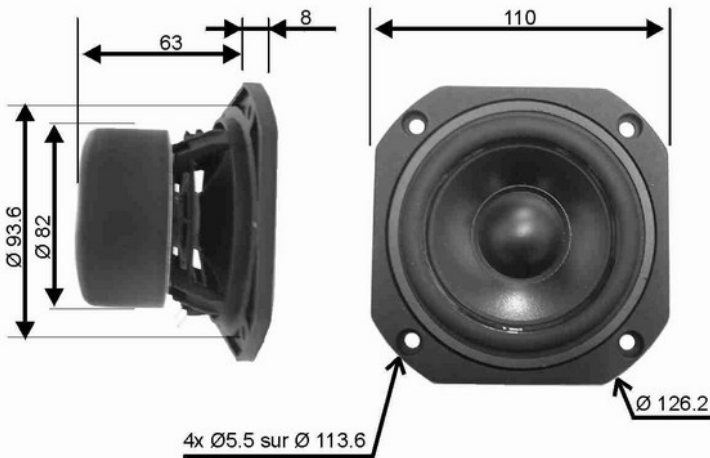

Nominal impedance . . . 8 ohms  
 Resonance . . . . . 68.26 Hz  
 Power handling (IEC) . . . . . 40 W  
 Sensitivity (2.83V/1m) . . . . . 85.9 dB  
 Resistance (DC) . . . . . 6.38 ohms  
 Inductance . . . . . 0.68 mH  
 Xmax . . . . . ± 2.0 mm  
 Qms . . . . . 2.40  
 Qes . . . . . 0.44  
 Qts . . . . . 0.37  
 Vas . . . . . 3.56 l

Voice coil diam. . . . . 25 mm  
 Voice coil length . . . . . 9 mm  
 Former . . . . . kapton  
 Layer(s) . . . . . 1  
 Wire type . . . . . flat  
 Force factor . . . . . 5.79 NA  
 Moving mass . . . . . 5.42 gr  
 Cone material . . . coated paper  
 Suspension . . . . . rubber  
 Chassis . . . . . die cast  
 Total mass . . . . . 0.90 kg

