



**6" Bass Midrange coated cone 8 ohms**

**AM130G0**

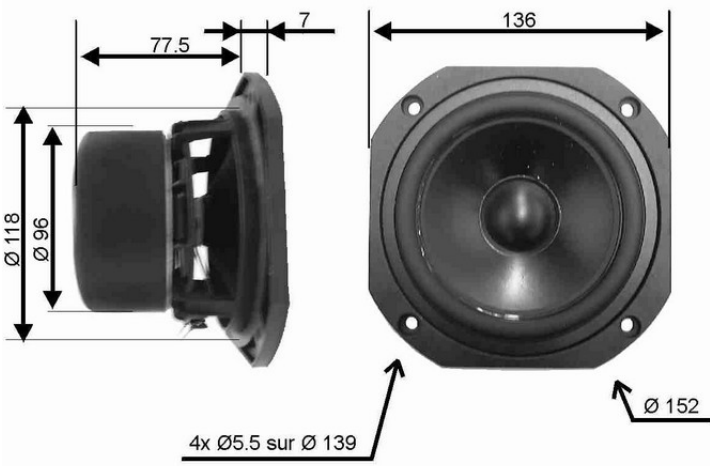

Non resonant die as chassis  
High loss rubber surround  
High temperature voice coil

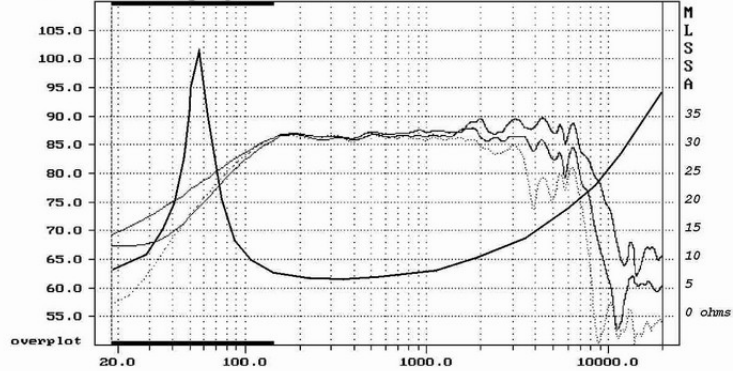

Nominal impedance . . . 8 ohms  
Resonance . . . . . 55.06 Hz  
Power handling (IEC) . . . . 50 W  
Sensitivity (2.83V/1m) . . . . 87.2 dB  
  
Resistance (DC) . . . . . 6.39 ohms  
Inductance . . . . . 0.71 mH  
Xmax . . . . . ± 2.6 mm  
Qms . . . . . 2.48  
Qes . . . . . 0.47  
Qts . . . . . 0.40  
Vas . . . . . 9.74 l

Voice coil diam. . . . . 25 mm  
Voice coil length . . . . . 11.2 mm  
Former . . . . . kapton  
Layer(s) . . . . . 1  
Wire type . . . . . flat  
Force factor . . . . . 6.27 NA  
Moving mass . . . . . 8.36 gr  
  
Cone material . . . coated paper  
Suspension . . . . . rubber  
Chassis . . . . . die cast  
Total mass . . . . . 1.2 kg

