



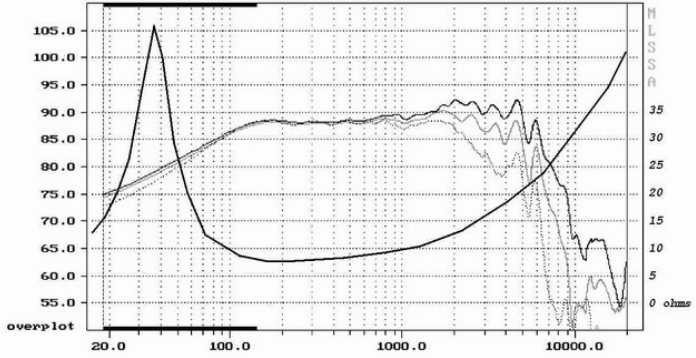

6" Bass coated paper cone 8 ohms


AM170G8

Non resonant die as chassis
 High loss rubber surround
 High temperature voice coil

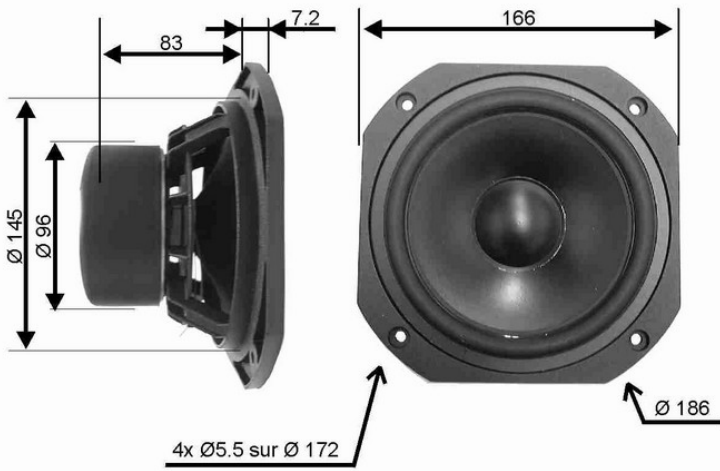

Nominal impedance . . . 8 ohms
 Resonance 43.81 Hz
 Power handling (IEC) 60 W
 Sensitivity (2.83V/1m) 89.2 dB
 Resistance (DC) 6.49 ohms
 Inductance 0.87 mH
 Xmax ± 3.25 mm
 Qms 2.40
 Qes 0.41
 Qts 0.35
 Vas 26.36 l

Voice coil diam. 30 mm
 Voice coil length 12.5 mm
 Former kapton
 Layer(s) 1
 Wire type flat
 Force factor 7.35 NA
 Moving mass 12.39 gr
 Cone material . . . coated paper
 Suspension rubber
 Chassis die cast
 Total mass 1.70 kg

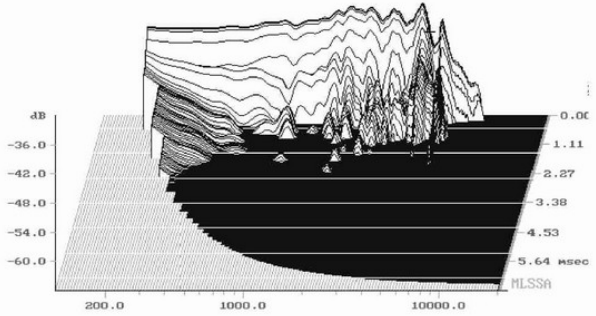

Audax Industries - Château du Loir (72) - France
 Pho +33 2 43 38 42 00 - Fax + 33 2 43 44 12 02
 European web site : <http://www.audax.fr>