
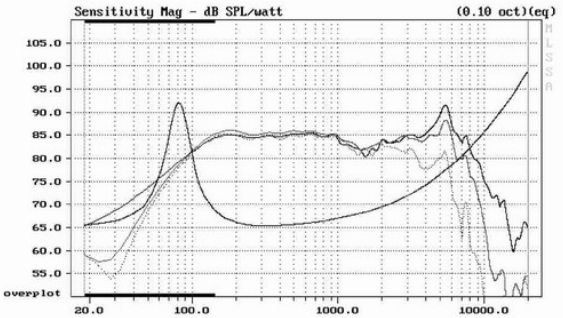


**4" Bass Midrange HDA cone 6 ohms**

**AP100Z0**

Fully shielded magnet system for audio/video applications  
Non resonant high impact polymere chassis  
High loss rubber surround

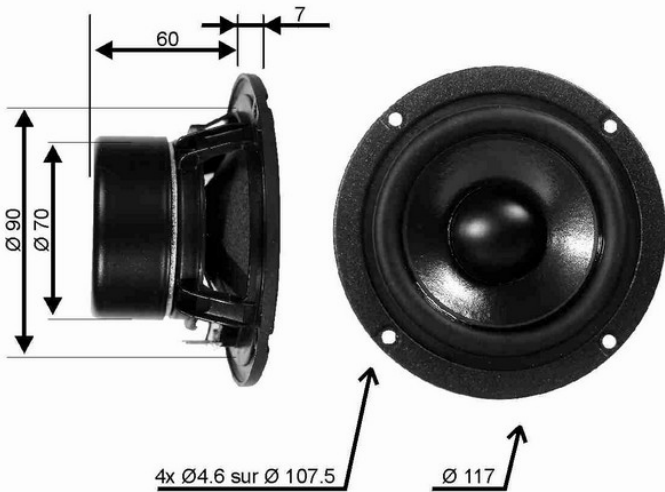

Nominal impedance . . . 6 ohms	Voice coil diam. . . . . 25 mm
Resonance . . . . . 64 Hz	Voice coil length . . . . . 9.4 mm
Power handling (IEC) . . . . . 30 W	Former . . . . . aluminium
Sensitivity (2.83V/1m) . . . . . 84.7 dB	Layer(s) . . . . . 2
	Wire type . . . . . round
Resistance (DC) . . . . . 5.7 ohms	Force factor . . . . . 3.99 NA <sup>-1</sup>
Inductance . . . . . 0.45 mH	Moving mass . . . . . 4.65 gr
Xmax . . . . . ± 2.7 mm	
Qms . . . . . 2.16	Cone material . . . . . HDA
Qes . . . . . 0.63	Suspension . . . . . rubber
Qts . . . . . 0.49	Chassis . . . . . polymer
Vas . . . . . 4.72 l	Total mass . . . . . 0.5 kg

