


APR2.2 Ribbon Tweeter



Impedance: 6ohms
 Rated Power: 30W
 Sensitivity: 91dB/W/m
 Frequency range: 1700Hz-30kHz
 Dimension of ribbon(mm): 8.5Wx60Lx0.015T
 Shape of ribbon: Non-corrugated
 Mass of ribbon: 16mg
 Moving area of ribbon: 510 square millimeter
 Gap flux: 0.55Tesi
 Recommended crossover frequency: 2500Hz
 Material of faceplate: aluminum
 Dimension of faceplate(mm): 74Wx110Hx4T
 Outside dimension(mm): 74Wx110Hx84D
 Net weight: 0.98kg/pc

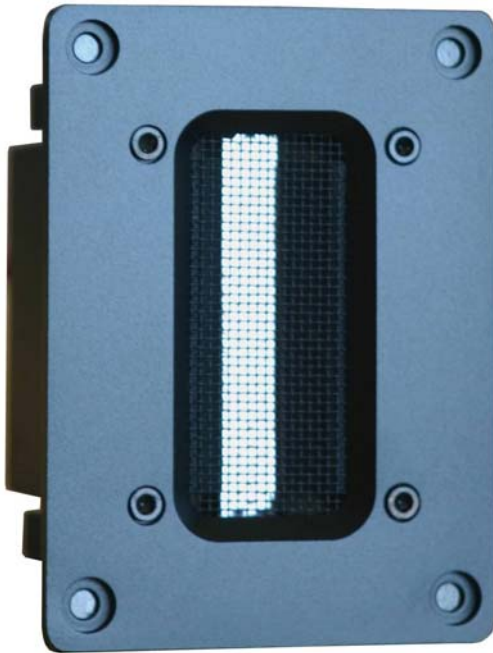