



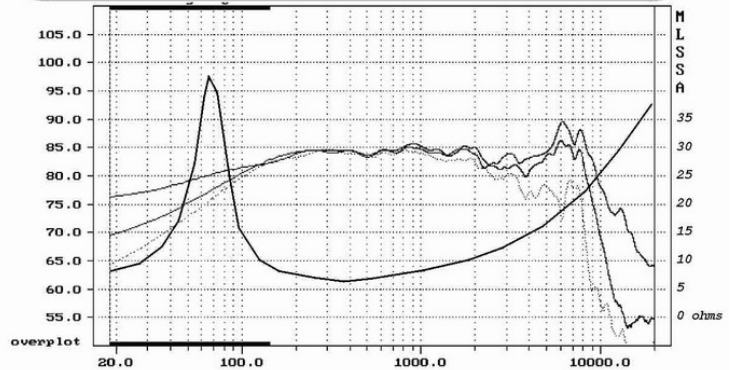

**4" Bass Midrange coated cone 8 ohms**

# HM100G12

Non resonant die cast chassis  
 High loss rubber surround  
 High temperature voice coil

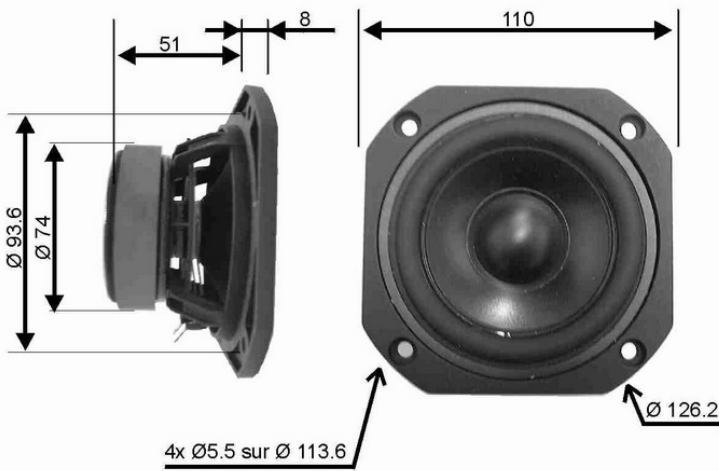

Nominal impedance . . . 8 ohms  
 Resonance . . . . . 70.96 Hz  
 Power handling (IEC) . . . . 40 W  
 Sensitivity (2.83V/1m) . . . . 85.2 dB  
 Resistance (DC) . . . . . 6.29 ohms  
 Inductance . . . . . 0.56 mH  
 Xmax. . . . . ± 2.5 mm  
 Qms. . . . . 3.20  
 Qts. . . . . 0.54  
 Vas. . . . . 3.25 l

Voice coil diam. . . . . 25 mm  
 Voice coil length . . . . . 9 mm  
 Former . . . . . kapton  
 Layer(s) . . . . . 1  
 Wire type . . . . . flat  
 Force factor . . . . . 5.34 NA  
 Moving mass . . . . . 5.49 gr  
 Cone material . . . coated paper  
 Suspension . . . . . rubber  
 Chassis. . . . . die cast  
 Total mass . . . . . 0.80 kg

