


2 or 3-way application
Paper cone
Corrugated paper
High temperature voice coil (37 mm Ø)
Stamped steel chassis

Utilisation 2 ou 3 voies
Cône papier
Suspension corruguée papier
Bobine haute température (Ø 37mm)
châssis acier embouti



RESPONSE CURVE
refer to page 16

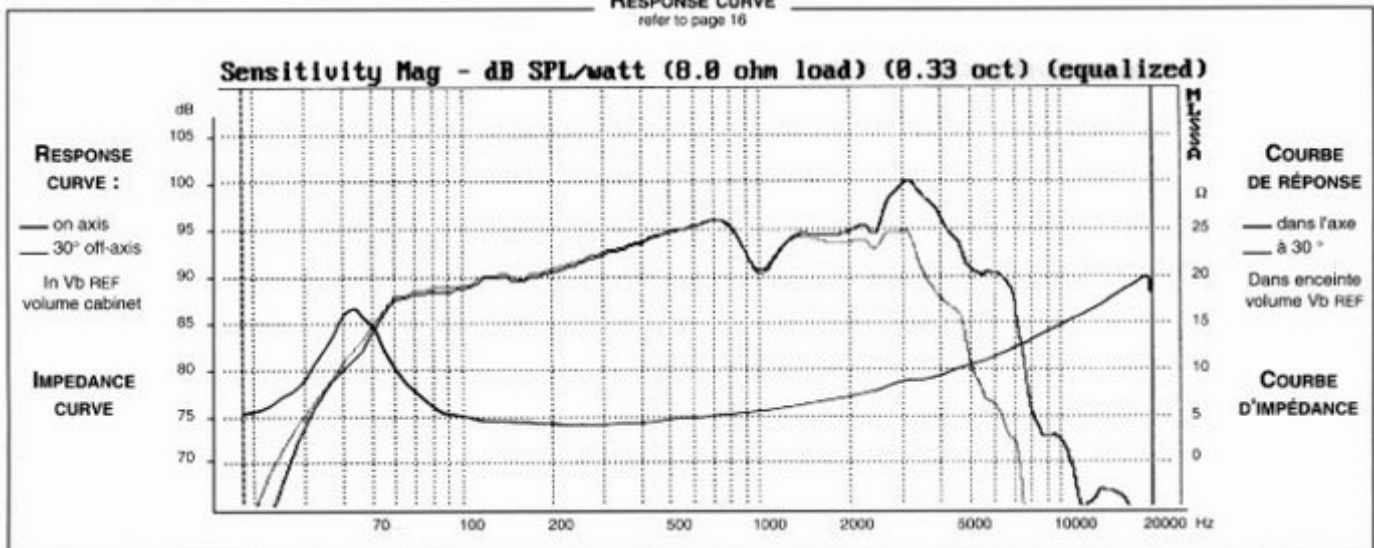

SPECIFICATIONS

Technical Characteristics	Symbol	Value	Units
PRIMARY APPLICATIONS			
Nominal Impedance	Z	8	Ω
Resonance Frequency	Fs	42	Hz
Nominal Power Handling	P	60	W
Sensitivity	E	93	dB
VOICE COIL			
Voice coil diameter	Ø	37	mm
Voice coil length	h	12,8	mm
DC Resistance	Re	7,2	Ω
Former	-	aluminium	-
MAGNET			
Magnet dimensions	Ø x h	100x18	mm
Magnet weight	m	550.10 ⁻³	kg
Force factor	BL	7,4	NA ⁻¹
Linear excursion	Xmax	±2,4	mm
PARAMETERS			
Total Q Factor	Qts	0,49	-
Moving Mass	Mms	1,8.10 ⁻³	kg
Volume Eq. of Air at Cas	Vas	101.10 ⁻³	m ³
Mass of speaker	M	1,8	kg

Designed for quality 2 or 3-way systems, this 10" driver has a paper cone and a corrugated paper suspension which is coated with a visco-elastic damping compound. The 1^{1/2}" high temperature voice coil is wound onto an aluminium former to ensure excellent power capacity.

Ce haut-parleur de 240 mm équipé d'un cône papier et d'une suspension corruguée papier amortie par un traitement visco-élastique est destiné à une enceinte 2 ou 3 voies de qualité. Sa bobine haute température de grand diamètre (37 mm) sur support aluminium lui confère une excellente tenue en puissance.

