


INDUSTRIAL SERIES

Elliptical stamped steel chassis
Paper cone
High temperature voice coil
Corrugated paper suspension
High efficiency - 95 dB
Smooth response

Châssis elliptique acier embouti
Cône papier
Bobine haute température
Suspension papier corruguée
Haut rendement - 95 dB
Courbe de réponse linéaire



RESPONSE CURVE
refer to page 16

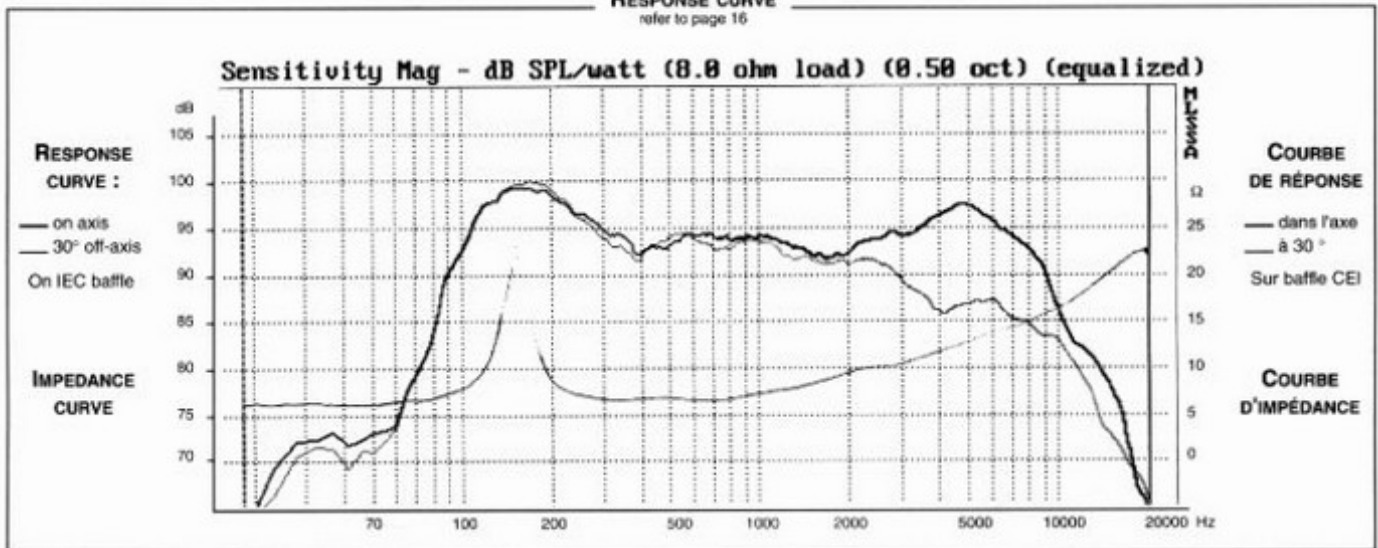

SPECIFICATIONS

Technical Characteristics	Symbol	Value	Units
PRIMARY APPLICATIONS			
Nominal Impedance	Z	8	Ω
Resonance Frequency	Fs	155	Hz
Nominal Power Handling	P	15	W
Sensitivity	E	95	dB
VOICE COIL			
Voice coil diameter	Ø	20	mm
Voice coil length	h	7	mm
DC Resistance	Re	6	Ω
Former	-	Aluminium	-
MAGNET			
Magnet dimensions	Ø x h	72 x 15	mm
Magnet weight	m	222.10 ⁻³	kg
Force factor	BL	3.54	NA'
Linear excursion	Xmax	±1.5	mm
PARAMETERS			
Total Q Factor	Qts	1,60	-
Moving Mass	Mms	4.6.10 ⁻³	kg
Volume Eq. of Air at Cas	Vas	4.9.10 ⁻³	m ³
Mass of speaker	M	600.10 ⁻³	kg

This high efficiency elliptical driver (95 dB) is suitable for any installation where a good price/quality ratio is required.

Ce haut-parleur elliptique, d'un rendement élevé (95dB) convient à toute installation qui requiert un rapport prix/performance attractif.

