

AUDAX

LA PASSION DU HAUT-PARLEUR

PR330T2**WOOFER**

100890R

13" - PAPER CONE DRIVER - 330 mm4 Ω **CAR LINE**


High power 150 W automotive application
 Coated textile suspension
 Ultra stiff die cast chassis
 Heat sink design
 Vented pole piece
 Kapton voice coil former (70 mm \varnothing)
 Flat copper wire
 Gold plated binding post

Application automobile forte puissance
 Suspension toile traitée
 Châssis moulé ultra-rigide
 Ailettes de refroidissement
 Noyau ventilé
 Bobine sur support Kapton (\varnothing 70 mm)
 Fil cuivre plat sur chant
 Bornes plaquées or




High power handling (150 W IEC - 300 W MUSIC), and high efficiency (96 dB) make this 13" woofer especially well suited for automotive applications (4 Ω). High heat dissipation with heatsink designed Zamak die cast chassis, edgewound flat copper wire mounted onto a fiberglass reinforced Kapton former and vented pole piece. Gold plated binding posts fitted onto the ultra-stiff Zamak die cast chassis are designed to accept large diameter cables. The "suggested applications" charts indicate various driver loads. The response curves shown on the diagram indicate the predicted low end response of the driver in the suggested box volume (Vb) with suggested port (Dp-Lp).

Ce haut-parleur de 330 mm à haut rendement (96 dB), haute tenue en puissance (150 W) est particulièrement destiné à des systèmes automobiles haut de gamme (4 Ω). Une structure magnétique largement dimensionnée (180 mm) est associée au châssis Zamak moulé ultra rigide, comportant des ailettes de refroidissement et au noyau ventilé assurant une dissipation optimisée de la chaleur. La bobine est sur support Kapton renforcé fibre de verre en fil de cuivre plat sur chant. Les borniers plaqués or permettent l'utilisation de câbles de forte section. Le tableau "Suggested applications" indique différents types de charge. Les courbes publiées correspondent à la réponse dans le grave pour un volume (Vb) et une dimension d'évent donnée (Dp-Lp).

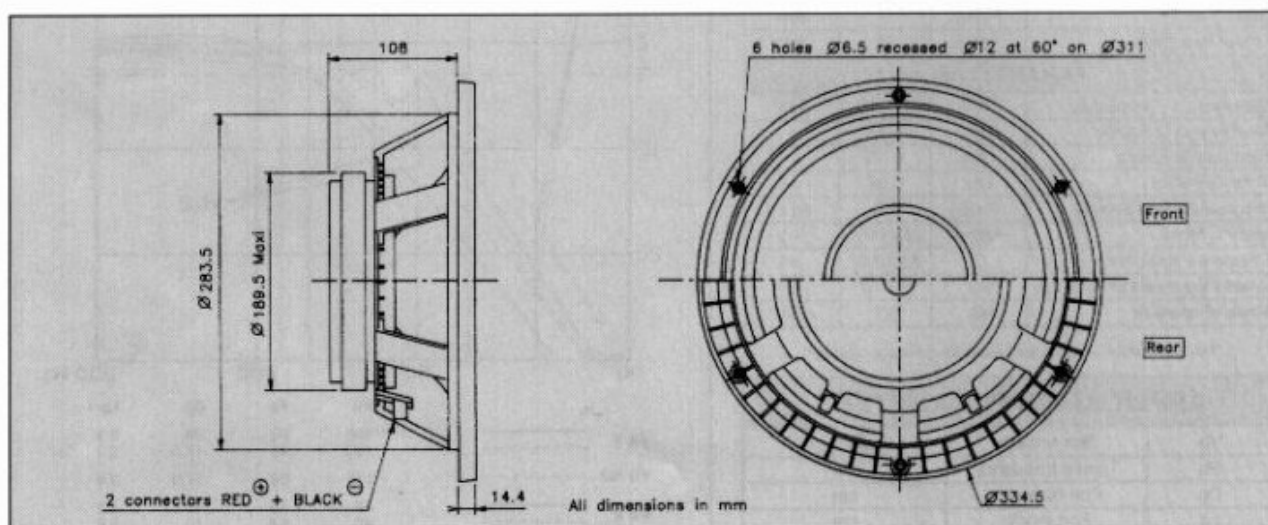

RESPONSE CURVE
refer to page 16

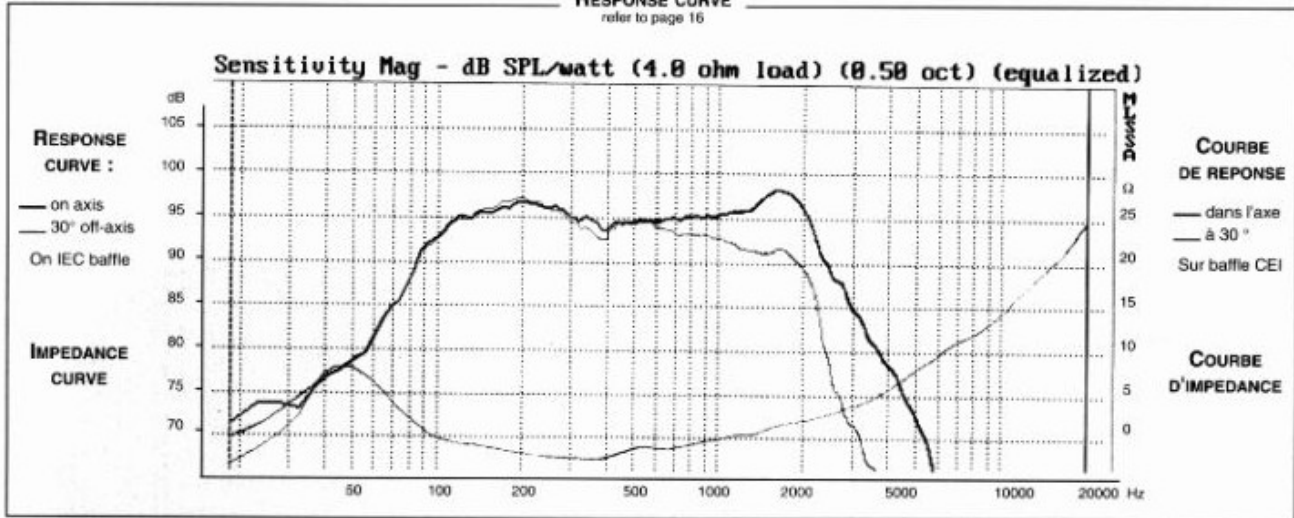

SPECIFICATIONS


Technical Characteristics	Symbol	Value	Units
PRIMARY APPLICATION			
Nominal Impedance	Z	4	Ω
Resonance Frequency	Fs	46,8	Hz
Nominal Power Handling	P	150	W
Sensitivity	E	96	dB
VOICE COIL			
Voice coil diameter	Ø	70	mm
Minimum Impedance	Zmin	4,1	Ω
DC Resistance	Re	2,7	Ω
Voice Coil Inductance	Lbm	0,49	mH
Voice coil Length	h	14,6	mm
Former	-	Kapton	-
Number of layers	n	1	-
MAGNET			
Magnet dimensions	Ø x h	184 X 20	mm
Magnet weight	m	1,91	kg
Flux density	B	1,2	T
Force factor	BL	11,1	NA'
Height of magnetic gap	He	7	mm
Stray flux	Fmag	-	Am ⁻¹
Linear excursion	Xmax	±3,8	mm
PARAMETERS			
Suspension Compliance	Cms	0,2 · 10 ⁻³	mN ⁻¹
Mechanical Q Factor	Qms	1,65	-
Electrical Q Factor	Qes	0,45	-
Total Q Factor	Qts	0,35	-
Mechanical Resistance	Rms	10,5	kg s ⁻¹
Moving Mass	Mms	59 · 10 ⁻³	kg
Effective Piston Area	S	5,38 · 10 ⁻¹	m ²
Volume Equivalent of Air at Cas	Vas	80 · 10 ⁻³	m ³
Mass of speaker	M	8	kg

APPLICATION PARAMETERS

Symbol	Description	Unit
Vb	Box volume	dm ³
Fb	Tuning frequency	Hz
Dp	Port diameter	cm
Lp	Port length	cm

IMPULSE RESPONSE

WATERFALL
refer to page 16

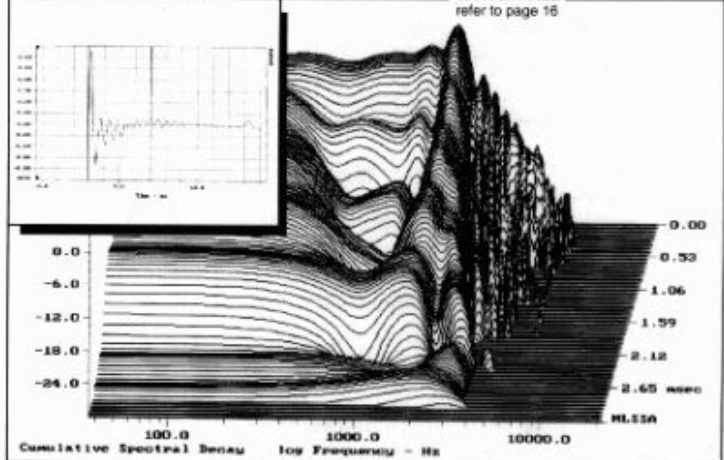

SUGGESTED APPLICATIONS
refer to page 8 to 13

