


High energy neodymium magnet
Round light design
Ferrofluid cooled voice coil



| | |
|--|------------------------------------|
| Nominal impedance . . . 8 ohms | Voice coil diam. 20 mm |
| Resonance 1523.5 Hz | Voice coil length 1.7 mm |
| Power handling (IEC) 40 W | Former aluminium |
| Sensitivity (2.83V/1m) 90.0 dB | Layer(s) 2 |
| Resistance (DC) 5.2 ohms | Cone material . . . soft polymer |
| Inductance 0.02 mH | Chassis polymer |
| Xmax ± 0.15 mm | Total mass 50 gr |

**Compact overmoulded magnet system
Inherently shielded - Smooth response face plate profile**

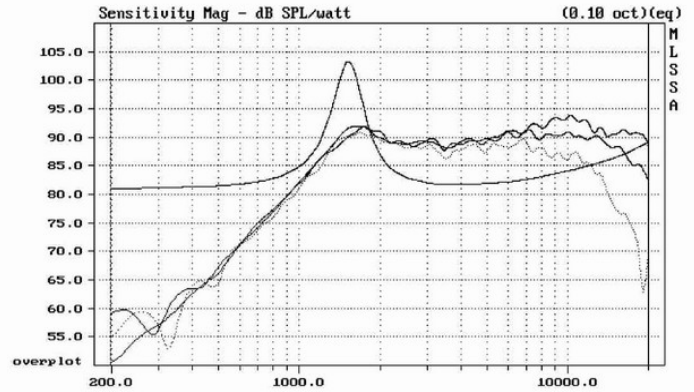