


Flexunits 10 A 77 25 10

Effective Cone Area	326 Cm ²
Nominal Impedance	8 Ohm
Resonance Frequency	25 Hz
Equivalent Air Volume	140 Ltrs.
Mechanical Q Factor	2.32
Electrical Q Factor	0.29
Total Q Factor	0.26
Acceleration Factor	259
Nominal Power Handling	200 W
Efficiency	91 dB
Frequency response	34-2200 Hz
DC resistance	5.4 Ohm
Compliance	0.9409 mm/Nm
Mechanical res.	2.916 Kg/s
VC inductance	0.76 mH
Moving mass	43.07 g
Force factor	11.17 N/A
Linear excursion (x-max)	8.6 mm
Max. excursion (P-P)	42 mm



Frequency response

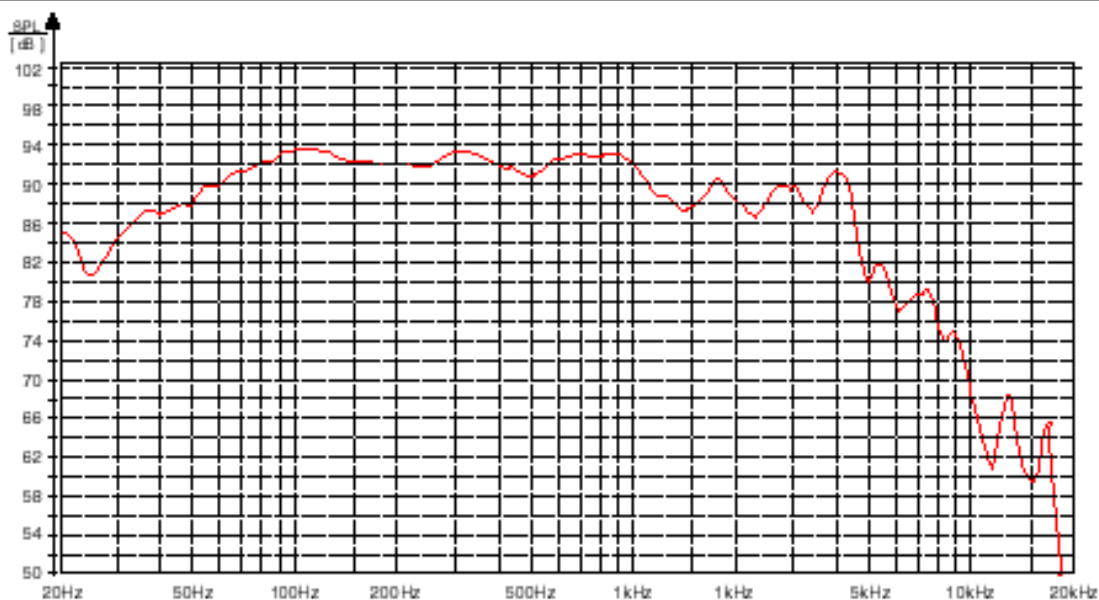

10A772510

