



CAW 538

Classic Advanced Woofer,
 Ø 5", Ø 3" voicecoil, 8Ω




SPECIFICATIONS

General Data		
Overall Dimensions	DxH	143mm(5.63")x65mm(2.55")
Nominal Power Handling (DIN)	P	150W
Transient Power 10ms		1000W
Sensitivity 1W/1M		86 dB SPL
Frequency Response		35-3500 Hz
Cone/Dome Material		Damped Polymer Composite
Net Weight	Kg	1.12
Electrical Data		
Nominal Impedance	Z	8Ω
DC Resistance	Re	5.2Ω
Voice Coil Inductance @ 1KHz	LBM	0.47mH
Voice Coil and Magnet Parameters		
Voice Coil Diameter	DIA	75mm
Voice Coil Height		12mm
HE Magnetic Gap Height	HE	6mm
Max. Linear Excursion	X	± 3mm
Voice Coil Former		Aluminum
Voice Coil Wire		Hexatech™ Aluminum
Number Of Layers		2
Magnet System Type		High flux double ferrite vented
B Flux Density	B	0.72 T
BL Product	BXL	6.9N.A
T-S Parameters		
Suspension Compliance	Cms	0.72 mm/N
Mechanical Q Factor	Qms	1.83
Electrical Q Factor	Qes	0.48
Total Q Factor	Qts	0.38
Mechanical Resistance	Rms	2.39 Kg/s
Moving Mass	Mms	14 g
Eq. Cas Air Load (liters)	VAS	8.2 Lt
Resonant Frequency	Fs	49 Hz
Effective Piston Area	SD	90 cm ²



FEATURES

- * Uniflow™ Aluminum diecast chassis
- * High flux ferrite double magnet system
- * 3" Large Hexatech™ Aluminum voice coil
- * High power handling
- * Shallow profile D.P.C cone
- * Improved parameters

Unit Dimintions

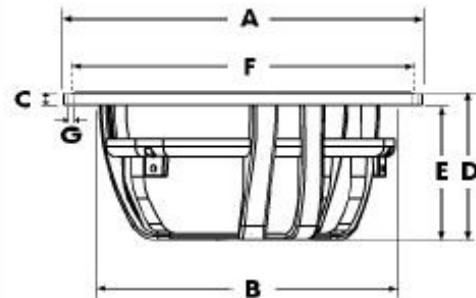

- A - Overall diameter 143mm
- B - Cut out diameter 121mm
- C - Flange thickness 5mm
- D - Overall height 65mm
- E - Basket depth 60mm
- F - Mounting holes location diameter 135mm
- G - 6 Mounting holes, at 60° interval, inner hole diameter Ø 4.2mm

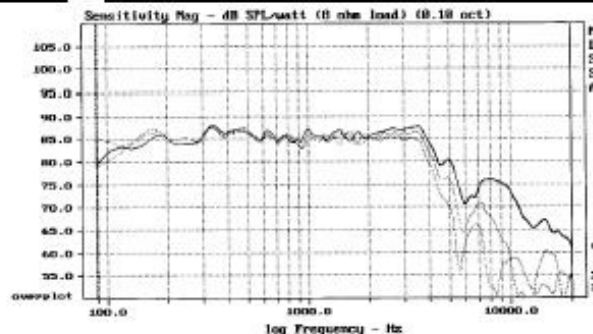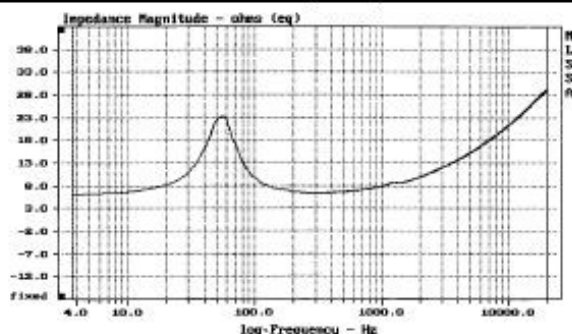

This model replaces former Morel MW-144 model.

Morel operate policy of continuous product design improvement, consequently specifications are subject to alteration without prior notice.