
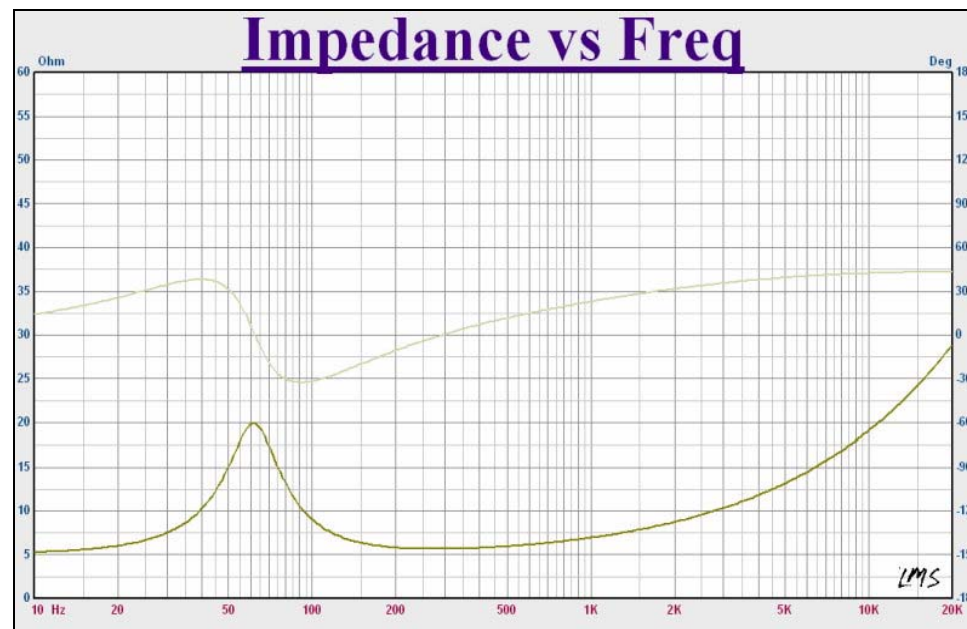


LW5004PMR

- Die-cast aluminum frame
- Vented pole piece
- Butyl rubber surround
- Huge 3" voice coil

Parameters	
Impedance (Ω)	6
Re (Ω)	5.0
Le (mH) @ 1k Hz	0.81
Fs (Hz)	61.7
Qms	2.22
Qes	0.75
Qts	0.56
Mms (g)	11.7
Cms (m/N)	0.57
Sd (cm ²)	86.6
BL (N/A)	5.5
Vas (L)	6.05
Xmax (mm)	2.45
VC diameter (mm)	75.5
SPL (dB/W/M)	84.6
RMS power handling (w)	60
Frequency range (Hz)	60~5,000

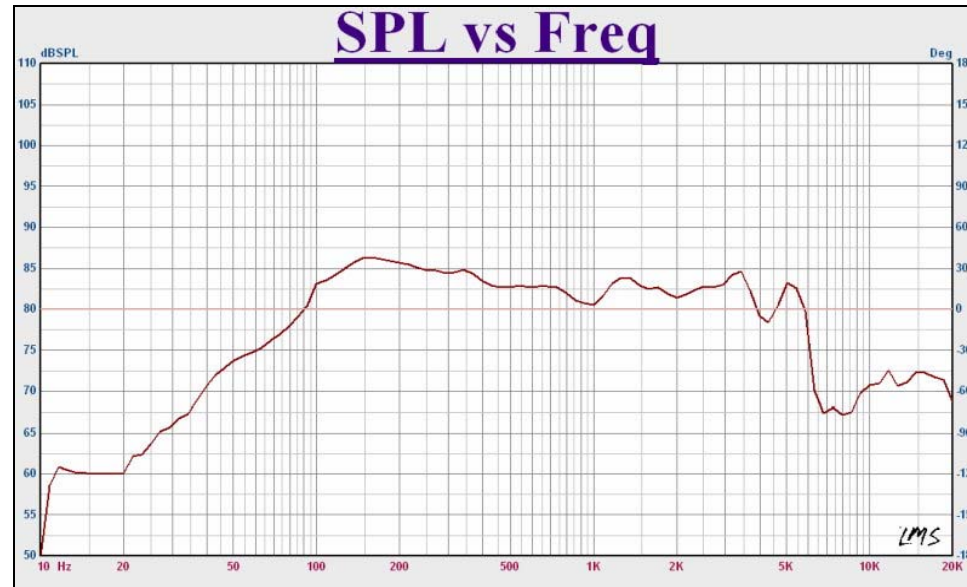

5-1/4" PP Mica Woofer

