
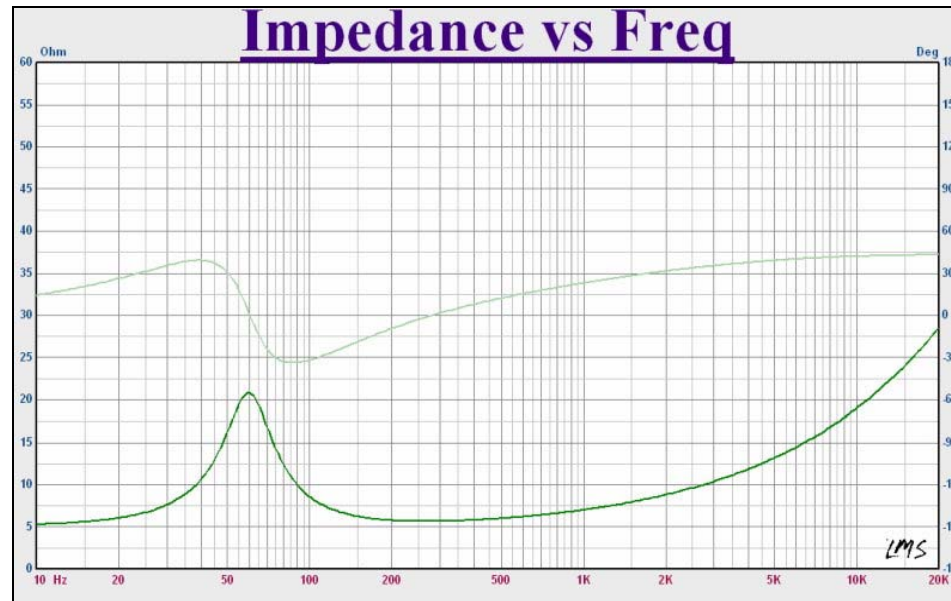


LW6004PMR

- Die-cast aluminum frame
- Vented pole piece
- Butyl rubber surround
- Huge 3" voice coil

Parameters	
Impedance (Ω)	6
Re (Ω)	5.0
Le (mH) @ 1k Hz	0.81
Fs (Hz)	59.9
Qms	2.39
Qes	0.76
Qts	0.58
Mms (g)	12.7
Cms (m/N)	0.56
Sd (cm ²)	116.9
BL (N/A)	5.6
Vas (L)	10.8
Xmax (mm)	2.45
VC diameter (mm)	75.5
SPL (dB/W/M)	86.7
RMS power handling (w)	60
Frequency range (Hz)	55~5,000

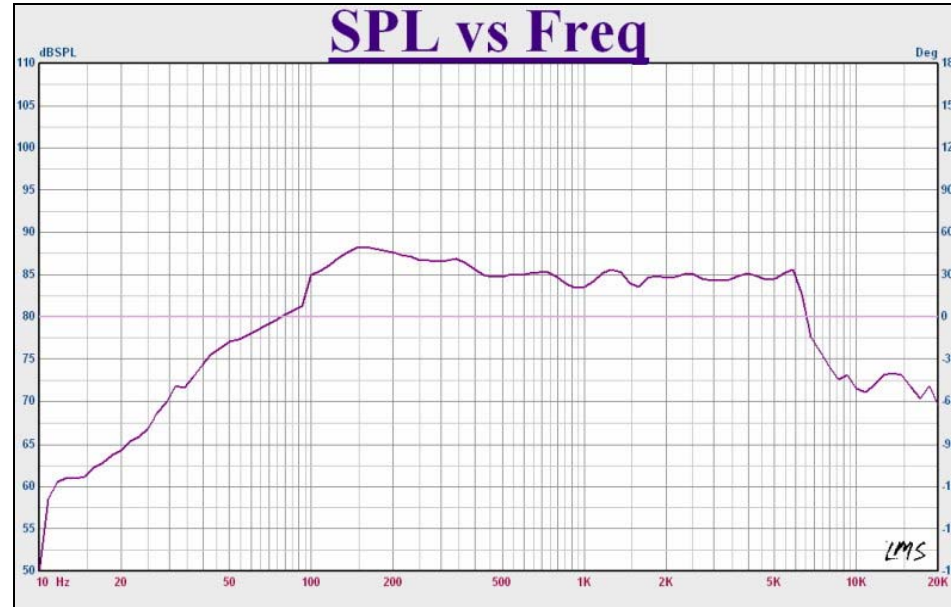

6-1/2" PP Mica Woofer

