
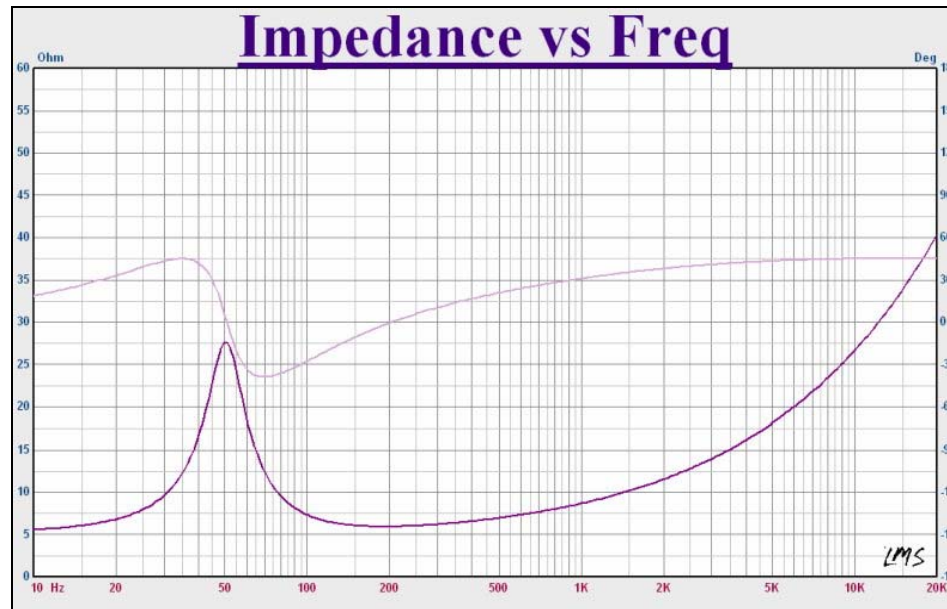


LW8004PMR

- Die-cast aluminum frame
- Vented pole piece
- Butyl rubber surround
- Huge 4" voice coil

Parameters	
Impedance (Ω)	6
Re (Ω)	5.1
Le (mH) @ 1k Hz	1.23
Fs (Hz)	50.5
Qms	3.12
Qes	0.71
Qts	0.58
Mms (g)	34.2
Cms (m/N)	0.29
Sd (cm ²)	235.1
BL (N/A)	8.8
Vas (L)	22.8
Xmax (mm)	3.4
VC diameter (mm)	99.2
SPL (dB/W/M)	88
RMS power handling (w)	100
Frequency range (Hz)	46~3,000

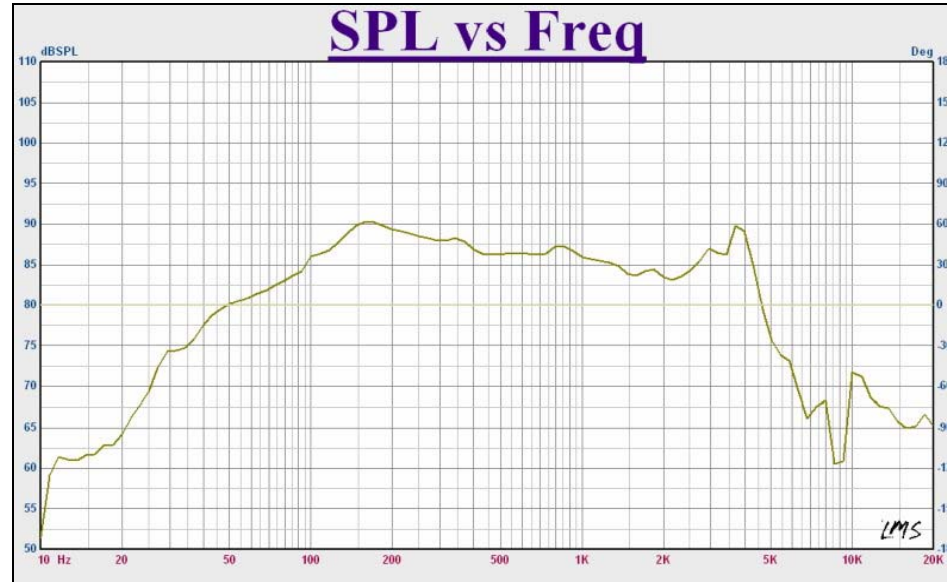

8" PP Mica Woofer

