


G3i Aluminum Ribbon Tweeter



Impedance: 6ohms
 Rated Power: 50W
 Sensitivity: 98dB/W/m
 Frequency range: 1400Hz-40kHz
 Dimension of ribbon(mm): 8.5W x100Lx0.01T
 Shape of ribbon: wave
 Mass of ribbon: 20mg
 Moving area of ribbon: 850 square millimeter
 Gap flux: 0.56Tesla
 Recommended crossover frequency: 2300Hz
 Material of faceplate: aluminum
 Dimension of faceplate(mm): 74Wx140Hx4.5T
 Outside dimension(mm): 74Wx140Hx77.5D
 Net weight: 1.3kg/pc

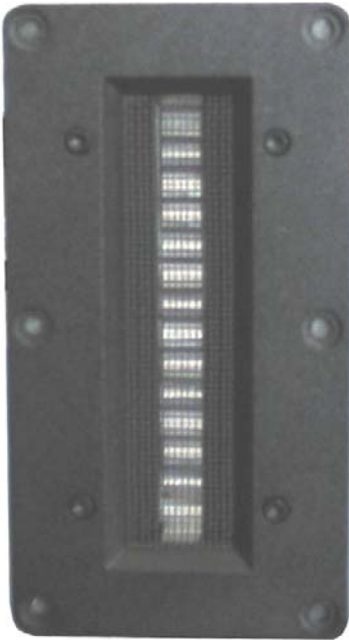