

MDT 43

Double Neodymium Magnet Top-Mount Soft-Dome Tweeter

Packed in Matched Pairs

The MDT43 is a small high quality tweeter which can be fixed to the top of a loudspeaker cabinet for accurate time alignment with the woofer. It features an ultra-compact, light-weight, vented double Neodymium magnet system for increased sensitivity, plus improved dynamic and transient performance. This is coupled to a large rear air chamber for a low resonance frequency of only 750Hz.

The same well-proven dome and voice coil assembly is used as in the MDT33. The 28mm (1.125") hand-treated cloth dome, Hexatech aluminium wire, aluminium former and braided lead-out wires help to provide a very linear and wide frequency response – both on and off axis – with low distortion, high power handling and lack of sound pressure level compression.

The superior power handling and low resonance frequency of the MDT43 enables the tweeter to safely be used with 6dB per octave filters having a relatively low crossover frequency.






MDT43 delivers a very fine standard of performance quite regardless of size. Indeed, certain improvements on the ceramic-magnet MDT33 have been incorporated.

MDT43 has a deep sealed rear chamber with an inverted conical end profile for strength and to minimise internal reflections; it is filled with dense natural wool felt for optimum damping and reflection absorption. The efficient enclosed magnetic circuit virtually eliminates stray magnetic fields, allowing use close to colour TV screens. The tweeter fits firmly onto a sturdy bracket, which can be secured to the loudspeaker by up to three screws.

Specification

Overall Dimensions	Ø44mm(1.73") x 58mm(2.28")
Facia Dimensions	Ø44mm (1.73")
Nominal Power Handling (Din)	120W
Transient Power - 10ms	1000W
Voice Coil Diameter	28mm (1.125")
Voice Coil Type/Former	Hexatech Aluminium
Frequency Response	2200-22000 Hz
FS - Resonant Frequency	750 Hz ± 10%
Sensitivity 1W/1m	92dB
Z - Nominal Impedance	8 ohms
RE - DC Resistance	5.2 ohms
Harmonic Distortion for 96dB SPL	< 0.8%
Intermodulation Distortion for 96dB SPL	< 0.2%
LBM - Voice Coil Inductance @ 1kHz	0.05 mH
Magnetic Gap Width	0.75mm (0.029")
HE - Magnetic Gap Height	2.5mm (0.098")
Voice Coil Height	2.7mm (0.106")
BL Product (BXL)	2.9
Qms - Mechanical Q Factor	0.86
Qes - Electrical Q Factor	1.62
Q/T - Total Q Factor	0.55
Vas - Equivalent Cas Air Load	0.01 litres
MMS - Moving Mass	0.46 gm
SD - Effective Cone/Dome Area	7 cm ²
Cone/Dome Material	Hand Treated Fabric
Nett Weight	0.100 kg

Specifications given are as after at least 45 minutes of high power, low frequency running, or 24 hours normal power operation.

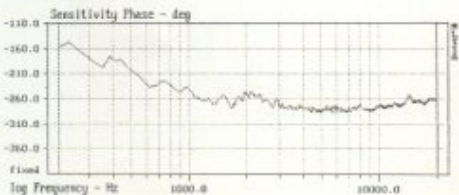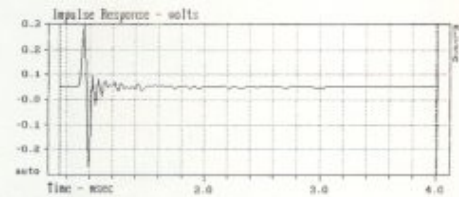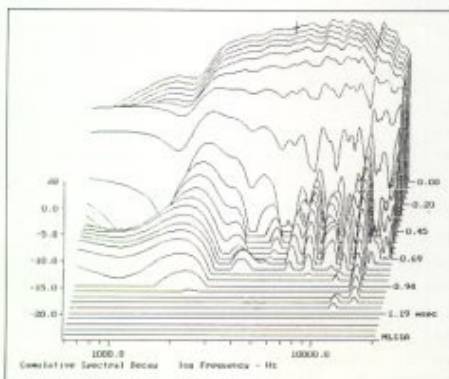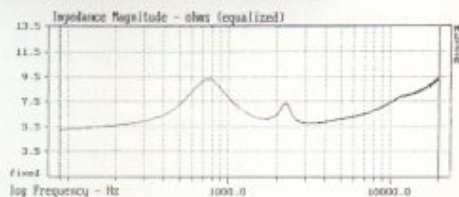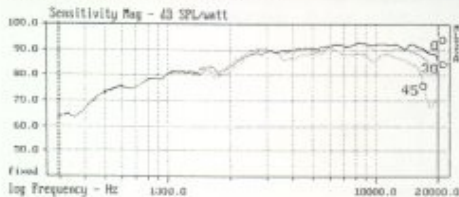

Morel operate a policy of continuous product design improvement, consequently specifications are subject to alteration without prior notice.

high
fidelity
range

