

Model Number: PLS-75F25AL02-08  
 Product Line: Peerless Gold

Revision: Rev 2\_0  
 Date: 2-Aug-12




**Product Description:**

This 3 inch 8 ohm member of the PLS family sets a high standard, for compact full range drivers intended for applications such as television soundbars and compact music systems. Design features in this family include a stiff steel basket with venting under the spider to aid cooling of the motor, a ferrite magnet motor with copper cap to lower coil inductance, providing low distortion at low frequencies and extended high frequency response. A black anodized aluminium cone is employed on the driver, along with a black anodized aluminium dust cap coupled directly to the voice coil. Additionally, the cones come equipped with special-designed large roll rubber surrounds, which allow for a dynamic linear response to high excursion input signals.



**Mechanical 2D Drawing:**

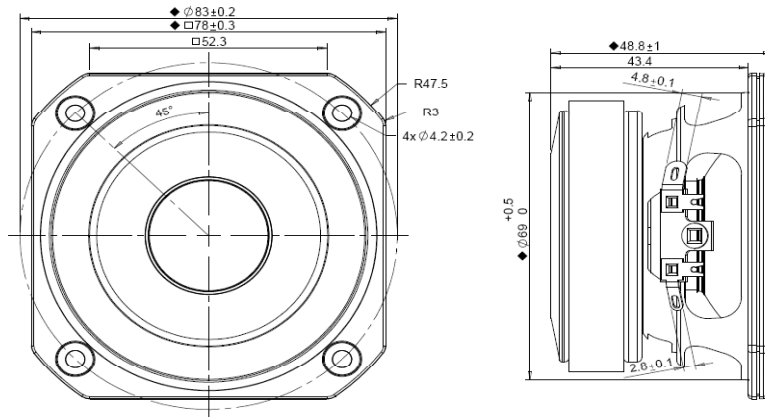

**Specifications:**

DC Resistance	$R_{evc}$	$\Omega$	6.3	$\pm 7.5\%$	Energy Bandwidth Product	EBP	$(1/Q_{es}) \cdot f_s$	118
Minimum Impedance	$Z_{min}$	$\Omega$	7.4	$\pm 7.5\%$	Moving Mass	$M_{ms}$	g	2.50
Voice Coil Inductance	$L_e$	mH	0.05		Suspension Compliance	$C_{ms}$	um/N	924.2
Resonant Frequency	$f_s$	Hz	105	$\pm 15\%$	Effective Cone Diameter	D	cm	6.1
Mechanical Q Factor	$Q_{ms}$	-	4.7		Effective Piston Area	$S_D$	cm <sup>2</sup>	29.2
Electrical Q Factor	$Q_{es}$	-	0.89		Equivalent Volume	$V_{as}$	L	1.108
Total Q Factor	$Q_{ts}$	-	0.75		Motor Force Factor	BL	T-m	3.42
Ratio $f_s / Q_{es}$	F	$f_s / Q_{es}$	140		Motor Efficiency Factor	$\beta$	$(T \cdot m^2) / \Omega$	1.84
Half Space Sensitivity @ 2.83V	$dB @ 2.83V/1m$	dB	84.8	$\pm 1.0^1$	Voice Coil Former Material	$VC_m$	-	ASV
Sensitivity @ 1W/1m	$1W/1m$	dB	83.8	$\pm 1.0^1$	Voice Coil Inner Diameter	$VC_d$	mm	25.7
Rated Noise Power (IEC 2685 18.1)	P	W	15		Gap Height	Gh	mm	4.0
Test Spectrum Bandwidth	100Hz-20KHz	12 dB/Oct			Maximum Linear Excursion	$X_{max}$	mm	2.1
					Ferrofluid Type	FF	-	N/A
					Transducer Size	-	-	3 inch
					Transducer Mass	-	Kg	0.38

1 - Piston Band Sensitivity Tolerance

**Frequency and Impedance Response:**

