

Model No.: GBS-200F35CP02-04
Product Line: Tymphany


Rev: 1
Last Update: 2017-06-02 15:54:02

Product Description

This 8 inch 4 ohm transducer member of the GBS family provides a very slim woofer capable of large excursion. A highly optimized ferrite motor and unique suspension layout combine to give a cost effective solution in a previously unavailable package.




Mechanical Drawing

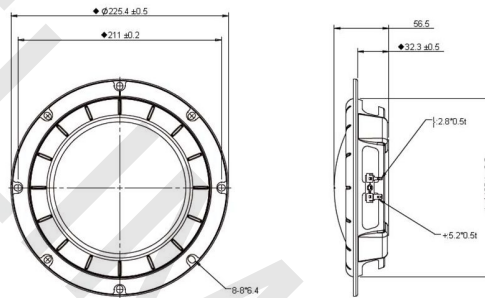

Specifications

DC Resistance	Revc	Ohms	3.52	5.0%	Energy Bandwidth Product	EBP	(1/Qes)*fs
Minimum Impedance	Zmin	Ohms	4.49	7.5%	Moving Mass	Mms	g
Voice Coil Inductance	Le	mH	1.81		Suspension Compliance	Cms	um/N
Resonant Frequency	Fs	Hz	41.8	15%	Effective Cone diameter	D	cm
Mechanical Q Factor	Qms		4.63		Effective Piston Area	Sd	cm^2
Electrical Q Factor	Qes		0.43		Effective Volume	Vas	L
Total Q Factor	Qts		0.39		Motor Force Factor	BL	Tm
Ratio Fs/Qts	F	Fs/Qts	106.63		Motor Efficiency Factor	β	(T*M^2)/Ohms
Half Space Sensitivity @2.83V	db@2.83V/1M	dB	87.05	+/- 1.0db	Voice coil former Material	VCfm	ASV
Half Space Sensitivity @1W/1M	db@1W/1M	dB	84.5	+/- 1.0db	Voice coil inner diameter	VCd	mm
Gap Height	Gh	mm	8		Rated Noise Power	P	W
Maximum Linear Excursion	Xmax	mm	5.2		Test Spectrum Bandwidth		40Hz-500Hz
Ferrofluid Type	FF				Driver Size		8 in
Driver Mass	Kg		2.28				

Frequency and Impedance Response

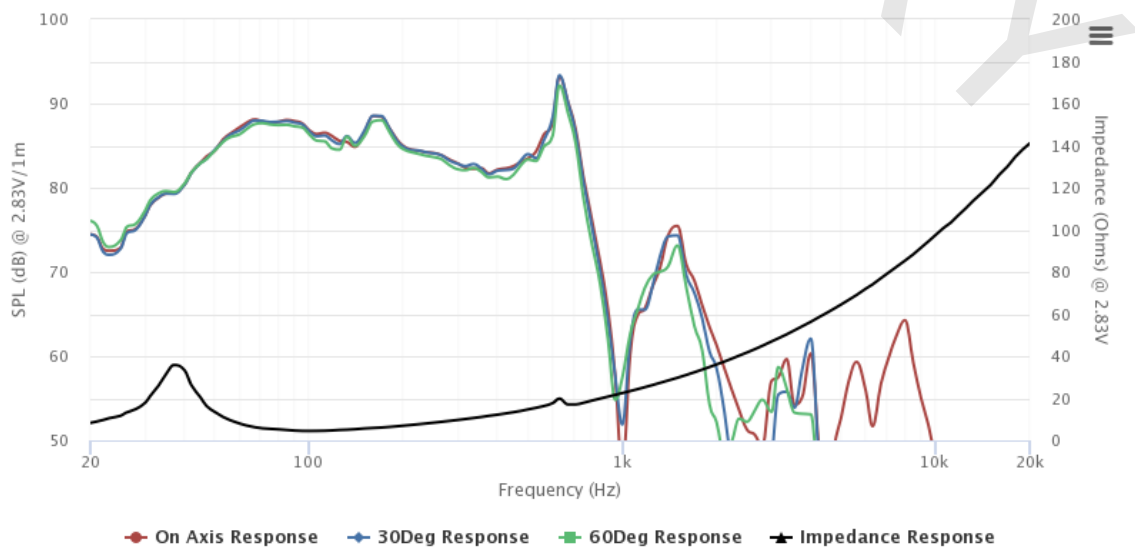

Highcharts.com