





PASSIVE RADIATOR

23W/0-00-00

The Revelator woofers and subwoofers features very rigid cones in paper or aluminium that operates as a piston over a wide frequency range, it results in very low distortion and a smooth and well behaved frequency response as well as perfect transient reproduction.







KEY FEATURES:

- Optimized for 23W/4557T00
- · Silver Anodized Rigid Alu Cone
- Die cast Alu Chassis

T-S Parameters

Resonance frequency [fs]	11 Hz
Mechanical Q factor [Qms]	11.50
Electrical Q factor [Qes]	-
Total Q factor [Qts]	-
Force factor [BI]	- Tm
Mechanical resistance [Rms]	2.29 kg/s
Moving mass [Mms]	400 g
Suspension compliance [Cms]	0.57 mm/N
Effective diaph. diameter [D]	172 mm
Effective piston area [Sd]	232 cm ²
Equivalent volume [Vas]	43.3 l
Sensitivity (2.83V/1m)	- dB
Ratio BI/√Re	- N/√W
Ratio fs/Qts	- Hz

Notes:

IEC specs. refer to IEC 60268-5 third edition. All Scan-Speak products are RoHS compliant. Data are subject to change without notice. Datasheet updated: February 22, 2011.

- Adjustable Weight for Optimum Fres
- Long Throw Surround

Electrical Data


Nominal impedance [Zn]	- Ω
Minimum impedance [Zmin]	- Ω
Maximum impedance [Zo]	- Ω
DC resistance [Re]	- Ω
Voice coil inductance [Le]	- mH
Power Handling	
100h RMS noise test (IEC 17.	1) - W
Long-term max power (IEC 1	7 3) - W
Long-term max power (ILC 1	, .5)
Long-term max power (ILC 1)	,,
Voice Coil and Magnet Data	,
	,
Voice Coil and Magnet Data	a
Voice Coil and Magnet Data Voice coil diameter	- mm
Voice Coil and Magnet Data Voice coil diameter Voice coil height	- mm
Voice Coil and Magnet Data Voice coil diameter Voice coil height Voice coil layers	- mm - mm
Voice Coil and Magnet Data Voice coil diameter Voice coil height Voice coil layers Height of gap	- mm - mm - mm - mm






PASSIVE RADIATOR

23W/0-00-00

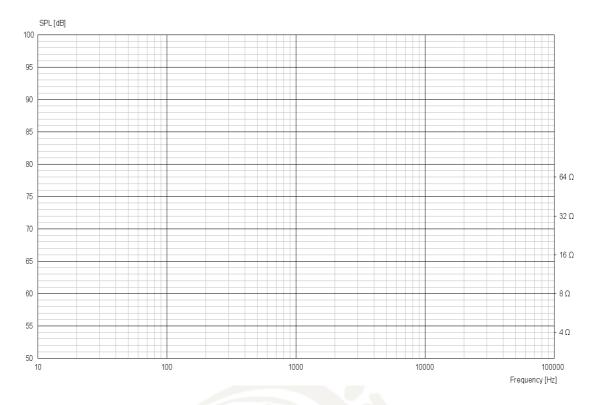

Advanced Parameters (Preliminary)

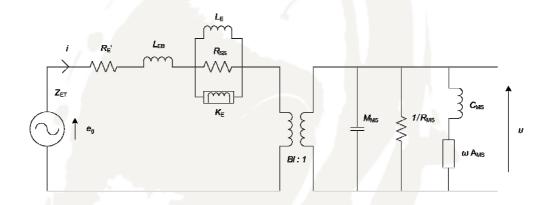

Electrical data:

Resistance [Re']	- Ω
Free inductance [Leb]	- mH
Bound inductance [Le]	- mH
Semi-inductance [Ke]	- SH
Shunt resistance [Rss]	- O

Mechanical Data

Force Factor [BI]	- Tm
Moving mass [Mms]	- g
Compliance [Cms]	- mm/N
Mechanical resistance [Rms]	- kg/s
Admittance [Ams]	- mm/N

