


## Tweeter

This D family tweeter features an 6 ohm 25 mm voice coil, a treated Al dome, large rear chamber for low resonant frequency, and a ferrofluid-cooled ferrite motor. The large motor and rear chamber allow for robust power handling capacity. The tweeter comes with a faceplate with recessed mounting holes, for easy installation into the desired application.



DA25BG08-06

SPECIFICATIONS									
DC Resistance	Revc	$\Omega$	5.2	$\pm 5.0\%$	Moving Mass	Mms	g	0.3	
Minimum Impedance	Zmin	$\Omega$	7.03	$\pm 7.5\%$	Suspension Compliance	Cms	um/N	135.1	
Voice Coil Inductance	Le	mH	0.02	-	Effective Cone Diameter	D	cm	2.91	
Resonant Frequency	fs	Hz	778.11	15%	Effective Piston Area	Sd	cm <sup>2</sup>	6.7	
Mechanical Q Factor	Qms	-	2	-	Equivalent Volume	Vas	L	0.01	
Electrical Q Factor	Qes	-	0.79	-	Motor Force Factor	BL	T•m	3.16	
Total Q Factor	Qts	-	0.57	-	Motor Efficiency Factor	$\beta$	(T•m <sup>2</sup> )/ $\Omega$	1.9	
Ratio	fs/Qts	-	1374.76	-	Voice Coil Former Material	VCfm	-		
Half Space Sensitivity	dB@2.83V/1m	dB	91.36	$\pm 1.01$	Voice Coil Inner Diameter	VCd	mm	25.4	
Sensitivity	1W/1m	dB	90.8	$\pm 1.01$	Gap Height	Gh	mm	3	
Rated Noise Power (IEC 268-5 18.1)	P	W	100	-	Maximum Linear Excursion	Xmax	mm	0.5	
Test Spectrum Bandwidth	1300 Hz - 20k Hz	12 dB/Oct	2KHz-20KHz	-	Ferrofluid Type	FF	-		
Energy Bandwidth Product	EBP	(1/Qes)•fs		-	Transducer Size	-	-	1 in	
				-	Transducer Mass	-	Kg	0.68	

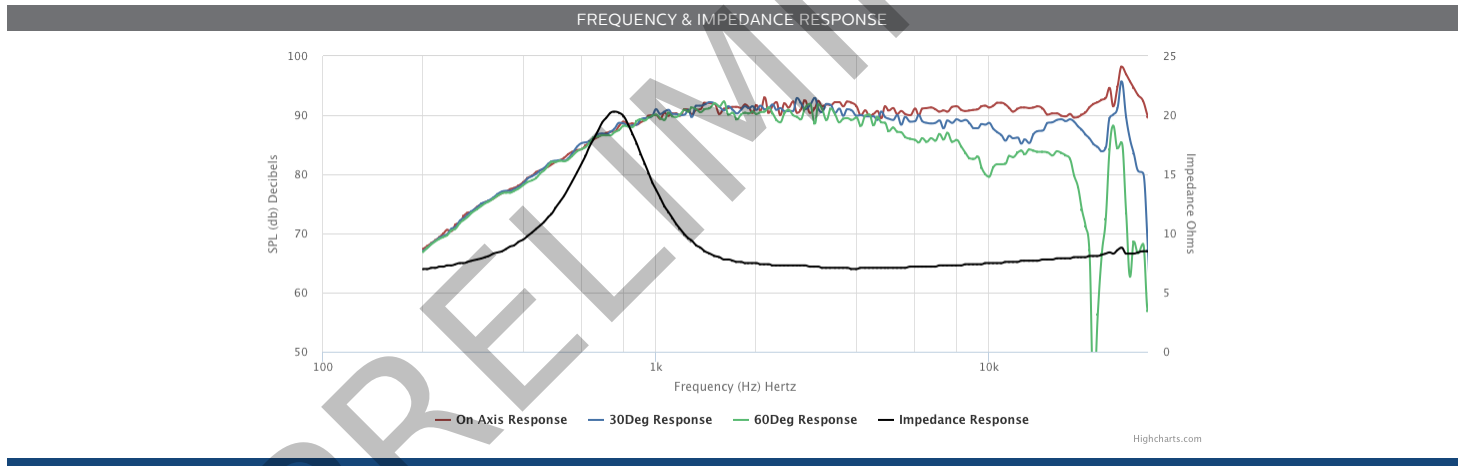

© 2015 Tymphany HK Ltd.  
 Address: 1307-8 Dominion Centre, 43-59 Queen's Rd. East., Wanchai, Hong Kong  
 Email: [sales@tymphany.com](mailto:sales@tymphany.com)