


1" NEODYM. TWEETER

D25AC-05-06

SPECIAL FEATURES:

- NEODYMIUM MAGNET
- "BUTTERFLY" V. C. ASSEMBLY
- MAGNETIC FLUID
- ALUMINIUM ALLOY DIAPHRAGM
- PREPARED FOR CUSTOMIZED FRONT
- IMPROVED OFF AXIS RESPONSE
- DESIGNED FOR CAR USE

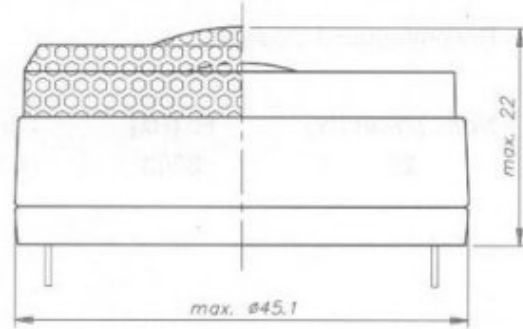

NOMINAL IMPEDANCE	6 Ω
NOMINAL POWER (IEC 286-5)	30 W
FREQUENCY RANGE	2.5-20 kHz
SENSITIVITY (1 W, 1 m)	87.5 dB
EFFECTIVE DIAPHRAGM AREA	7.1 cm ²
VOICE COIL RESISTANCE	4.6 Ω
OPERATING POWER	7.1 W
VOICE COIL DIAMETER	25 mm
VOICE COIL HEIGHT	1.6 mm
AIR GAP HEIGHT	2 mm
FREE AIR RESONANCE	1700 Hz
MOVING MASS (incl. air)	0.3 g
FORCE FACTOR, BxI	2.5 Txm
MAGNET WEIGHT (0.4 oz)	11 g

