


W15/CS

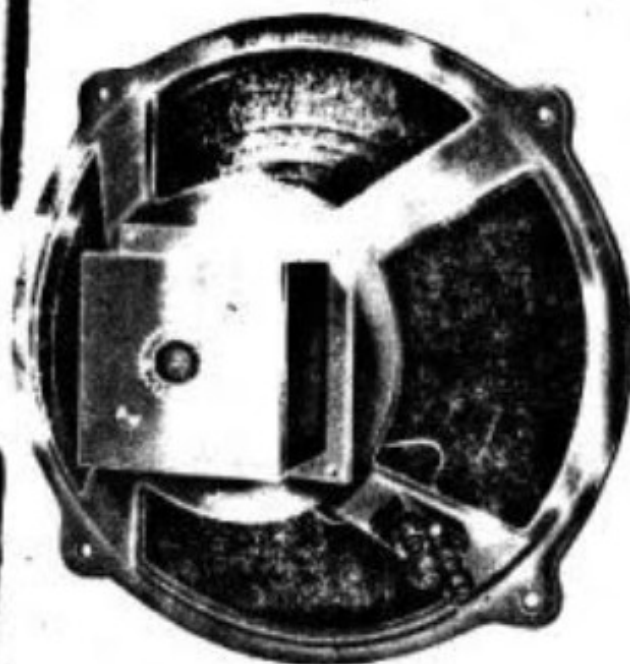

Flux Density 13,500 lines cm^2 . 2" centre pole. Total Flux 180,000 lines. Speech Coil 6/8 or 12/15 ohms. Peak Input 15 watts. Chassis diameter 14 $\frac{1}{2}$ ". Alcomax II Magnet.

The W15/CS is now generally recognised as the best LF unit for domestic use so far produced in this or any other country. The speaker is designed for smooth response between 25 and 2,000 c/s, with heavy cone and long speech coil. It is the ideal bass speaker for crossover networks.

When provided with 8 or 9 cu.ft. of air-loading, the cone resonance is below 25 c/s, thus avoiding frequency doubling and providing a means of reproducing "beats" and difference tones which are so rarely heard in conventional equipment.

RESPONSE CURVE

Input 1 watt
Mic. on axis

