

AUDAX
LA PASSION DU HAUT-PARLEUR

5^{1/4"} - Paper cone driver - 130 mm

HT130A0

INDUSTRIAL SERIES


BASS MIDRANGE
100784T

Bass midrange or wide band applications
Paper cone
Corrugated paper suspension
High temperature voice coil
Stamped steel chassis

Utilisation large bande ou 2 voies
Cône papier
Suspension corruguée papier
Bobine haute température
Châssis acier embouti




RESPONSE CURVE
refer to page 10

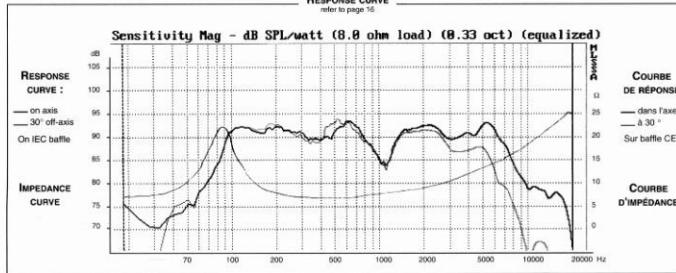

SPECIFICATIONS			
Technical Characteristics	Symbol	Value	Units
PRIMARY APPLICATIONS			
Nominal Impedance	Z	8	Ω
Resonance Frequency	Fs	80	Hz
Nominal Power Handling	P	30	W
Sensitivity	E	91	dB
VOICE COIL			
Voice coil diameter	Ø	25	mm
Voice coil length	h	10	mm
DC Resistance	Re	5,7	Ω
Former		Aluminium	-
MAGNET			
Magnet dimensions	Ø x h	72 x 15	mm
Magnet weight	m	240.10 ⁻³	kg
Force factor	BL	4	NA ²
Linear excursion	Xmax	±3	mm
PARAMETERS			
Total Q Factor	Qts	0.58	-
Moving Mass	Mms	4.10 ⁻³	kg
Volume Eq. of Air at Cas	Vas	8.4.10 ⁻³	m ³
Mass of speaker	M	630.10 ⁻³	kg

Designed for compact 2-way and multi-purpose wide band applications, this 5^{1/4"} paper cone driver has a corrugated paper surround coated with a rubber based damping compound. The high temperature voice coil wound on an aluminium former ensures high power handling capacity.

Ce haut-parleur de 130 mm à cône papier et suspension corruguée papier amortie par un traitement visco-élastique est destiné à des systèmes 2 voies compacts de qualité ou à l'utilisation en large bande. Une bobine haute température sur support aluminium lui confère une bonne tenue en puissance.

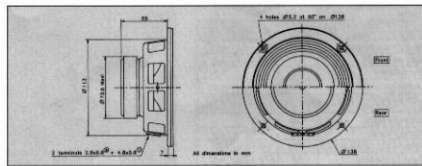

HT130A0 W08FP2512

Please refer to method of measurement and measurement conditions page 15 to 19.

Audax may, without prior notification modify the specifications on its products further to research and development requirements.

100866B