



Full range with bi-cone technology : 120 to 15 000 Hz
Coated paper cone and coated textile surround
High temperature voice coil

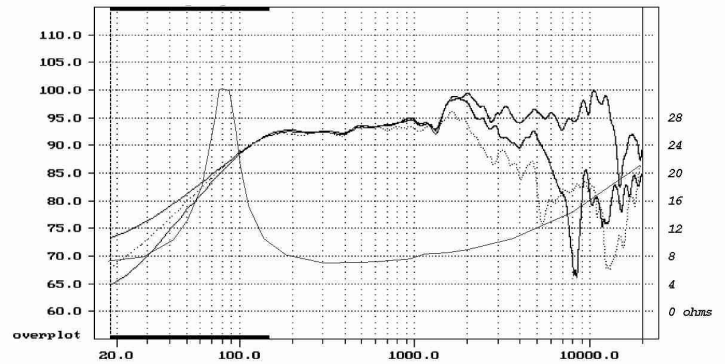

Nominal impedance 8 ohms	Voice coil diam. 25 mm
Resonance 73.07 Hz	Voice coil length 6 mm
Power handling (IEC) 35 W	Former aluminium
Sensitivity (2.83V/1m) 93.5 dB	Layer(s) 2
	Wire type round
Resistance (DC) 5.66 ohms	Force factor 5.91 NA ⁻¹
Inductance 0.42 mH	Moving mass 6.89 gr
Xmax ± 0.5 mm	
Qms 2.45	Cone material coated paper
Qes 0.51	Suspension coated textile
Qts 0.42	Chassis stamped steel
Vas 19.22 l	Total mass 0.95 kg

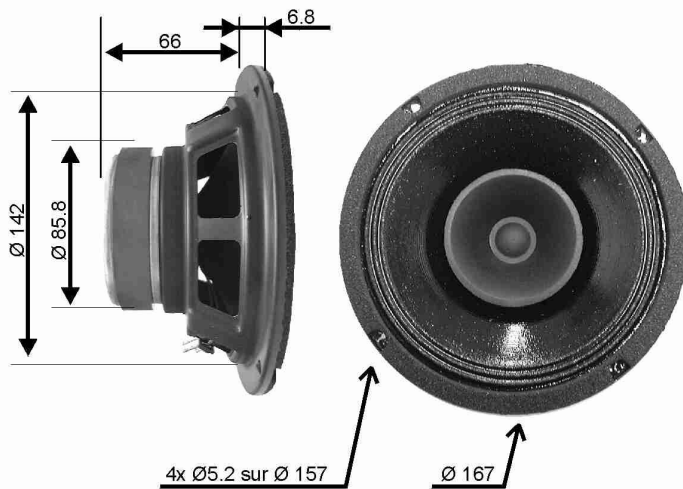