

25TFFN/QG H0625

Compact neodymium magnet tweeter with a square chassis for high quality speaker design in small cabinets or automobiles.


Precoated Sonotex fabric diaphragm and suspension allows for very tight production tolerances and high consistency.


A Hexagrid protects the diaphragm.

Very low magnetic stray fields make this unit suitable for A/V systems.

Voice coil immersed in magnetic fluid, allowing high power handling capacity and simplified crossover design.



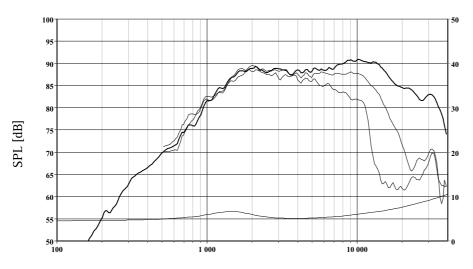

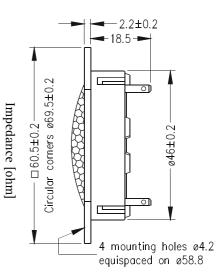

Frequency [Hz]

The frequency responses above show measured free field sound pressure in 0, 30, and 60 degrees, mounted in a 0.6m by 0.8m baffle. Input 2.83 Vrms, microphone distance 0.5m, normalized to SPL 1m. The impedance is measured without baffle using a 2V sine signal.

Nominal Impedance	6 Ohms	Voice Coil Resistance	4.8 Ohms
Recommended Frequency Range	3000 - 25000 Hz	Voice Coil Inductance	0.05 mH
Short Term Power Handling *	220 W	Force Factor	2.45 N/A
Long Term Power Handling *	90 W	Free Air Resonance	1800 Hz
Characteristic Sensitivity (2.83V, 1m)	89 dB	Moving Mass	0.3 g
Voice Coil Diameter	26 mm	Effective Piston Area	7.0 cm ²
Voice Coil Height	1.5 mm	Magnetic Gap Flux Density	1.3 T
Air Gap Height	2.0 mm	Magnet Weight	0.01 kg
Linear Coil Travel (p-p)	0.5 mm	Total Weight	0.1 kg

Jul 2007-1 *IEC 268-5, via High Pass Butterworth Filter 2500Hz 12 dB/oct. SEAS reserves the right to change technical data

T25-911